S3006P/3008P/3010P PUSH-AROUND MINI SCISSOR LIFTS



- Lightweight and compact
- Easily passes through a standard doorway
- No outriggers or stabilisers required
- Durable design for tough site conditions
- Proven benefits over other low level access products:
 - better job site productivity
 - safer and more convenient working conditions
 - better return on investment (ROI) for rental/hire companies




PUSH-AROUND MINI SCISSOR LIFTS S3006P

DIMENSIONS	\$3006P	S3008P	\$3010P
Max. working height	4.0m	4.5m	5.0m
Max. platform height (A)	2.0m	2.5m	3.0m
Overall width (B)	0.75m	0.75m	0.75m
Overall length (C)	1.2m	1.2m	1.2m
Stowed height (D)	1.7m	1.8m	1.8m

PERFORMANCE			
Platform capacity (SWL)	240kg	240kg	240kg
Max. wind speed	0m/s	0m/s	0m/s
Raise/lower time	8/14 sec	13/17 sec	19/26 sec

POWER	
Power source	12V DC battery
Charger	Built in multi-voltage (90V - 240V)

WEIGHT			
Weight	310kg	350kg	370kg



STANDARD FEATURES


- Auto brake system
- Tilt sensor
- Saloon-door style entry gates

6

- Integrated battery charger 90V-240V
- Battery charge indicator
- Forklift pockets
- Emergency lowering system
- Non-marking casters
- Slide-out service trays
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental hydraulic oil

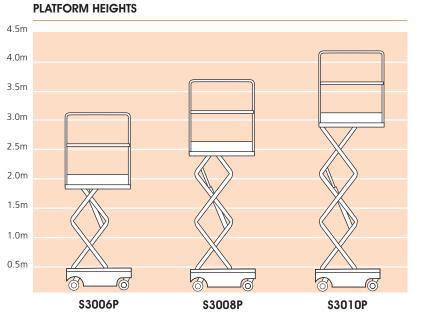

CE Specification © Snorkel 2018

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales@snorkellifts.com

www.snorkellifts.com